


Fringequality 9
 SNR 4814.8
 Int time 0.332
 Amp 10000.000
 Phase 0.0
 PFD 0.0e+00
 Delays (us)
 SBD 0.000000
 MBD -0.000078
 Fringe rate (Hz) 0.000000
 Ion TEC 0.000
 Ref freq (MHz) 7392.0000
 AP (sec) 0.032
 Exo sim
 Exper# 16383
 Yrday 2019:024
 Stan 122124.00
 Slos 122124.99
 FRT 122124.00
 Corr/FF/uid
 2020:199:141928
 2020:199:142249
 2020:175:100614
 RA & Dec (J2000)
 03h49m10.967080s
 +00°00'00.000000"

Amp. and Phase vs. time for each freq., 31 segs, 1 APs / seg (0.03 sec / seg.), time ticks 1 sec
 All

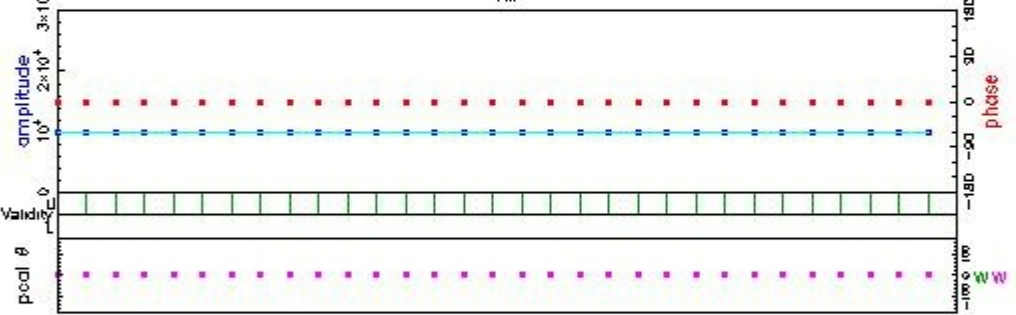

7392.00	Reo (MHz)	
0.0	Phase	
10000.00	Amp	
65.0	Sd bar	
URL 31.00	APs used	
W 0	PC freqs	
W 0	PC freqs	
WW 0.0	PC phase	
WW 0.0	Went PC	
W 1000	PC amp	
W 1000		
W X000R	Chan ks	
W X000R	Chan ks	

Group delay (usec)/modeh	7.73004004004E-05	Aptort delay (usec)	0.0000000000E-00	Resti mbdelay (usec)	7.73004E-05	← 7.2E-05
Sband delay (usec)	0.0000000000E-00	Aptort clock (usec)	0.000000E-00	Resti sbdelay (usec)	0.00000E-00	← 7.2E-05
Phase delay (usec)	4.15703897141E-18	Aptort clckrate (1/us)	0.0000000E-00	Resti phdelay (usec)	4.15700E-18	← 8.1E-00
Delay rate (1/us)	0.0000000000E-00	Aptort rate (1/us)	0.0000000000E-00	Resti rate (1/us)	0.00000E-00	← 1.4E-03
Total phase (deg)	0.0	Aptort accel (1/us/s)	0.0000000000E-00	Resti phase (deg)	0.0	← 0.0

ph/sig (Mag)	0.0	0.1	Search (4X2)	10000.000	Pcal mode	MANUAL	MANUAL	PCperiod (AP's)	5		
amp/sig (%)	0.0	0.1	Inerp	0.000	Pcal rate	0.000E-00	0.000E-00	(1/us)	sbwindow (us)	1000	1000
ph/rf (Mag)	0.0	0.0	Inc seg avg	999999	Br/sample	2x2	SamprNorm	disabled	mbwindow (us)	0000	0000
amp/rf (%)	0.0	0.0	Inc frq avg	10000.000	Sample rate (M/Samps)	32			drwindow (us)	0010	0010

W a2 25.3 d 4.0 pa 40.7 W a2 25.3 d 4.0 pa 40.7 u v (1/us) 0.000 0.000 simultaneous Interpolar

Control file: default Input file: (home)\gnur\rfsoftware\Baseband\Sim\234\9.M001\WW_18UPDC Output file: Suppressed by rest mode